






Now available  
with  
**Hole numbering**

# Form-on smartPROPplus 20

-  light weight
-  long lifespan
-  high load capacity

**FORM-ON**<sup>®</sup> based in the USA

# Form-on smartPROPlus 20

## Your benefits:


- light weight allows for speedy work and conserves energy
- post shore retains its value for many years because of its high-quality production and galvanisation
- reliable in many applications due to forged nut and 8 mm top- and foot-plate
- optimised thread pitch allows for quick and safe release of fixed post shore
- safe working conditions because of the handtrap-prevention and anti-drop-out latch
- quick and easy height adjustment thanks to numbered and angraved pegging holes and anti-drop-out latch

## Technical specifications:

**Certificate:** Z-8.311-946  
**Load capacity:** min. 20 kN at any extension length up to 36.7 kN depending on extension length, as per Ansi **6.0 kip** at any extension length  
**Factor of Safety:** FoS 3 : 1  
**Standard:** EN 1065 class B/D

Form-on smartPROPlus 20	Length	P.U.	kg/lbs.	Art.no.
Form-on smartPROPlus 20 250	148 - 250 cm (4'8" - 8'2")	48	11.5/25.4	620000100
Form-on smartPROPlus 20 300	173 - 300 cm (5'8" - 9'10")	42	13.95/30.8	620002000
Form-on smartPROPlus 20 350	198 - 350 cm (6'6" - 11'5")	42	17.15/37.8	620003000
Form-on smartPROPlus 20 400	223 - 400 cm (7'4" - 13'1")	35	20.5/45.2	620004000
Form-on smartPROPlus 20 550	298 - 550 cm (9'9" - 18'1")	30	32.5/71.7	620007000

post shore length in m (ft)	250		300		350		400		550	
	bottom kN (lbs)	top kN (lbs)	bottom kN (lbs)	top kN (lbs)	bottom kN (lbs)	top kN (lbs)	bottom kN (lbs)	top kN (lbs)	bottom kN (lbs)	top kN (lbs)
5.5 (18')									20.6 (4631)	22.7 (5103)
5.4 (17'7")									21.6 (4856)	23.9 (5373)
5.3 (17'4")									22.5 (5058)	25.1 (5643)
5.2 (17'1")									23.6 (5305)	26.5 (5957)
5.1 (16'7")									24.7 (5553)	27.9 (6272)
5.0 (16'4")									25.7 (5778)	29.4 (6609)
4.9 (16'1")									27.2 (6115)	31.0 (6969)
4.8 (15'7")									28.7 (6452)	32.5 (7306)
4.7 (15'4")									30.1 (6767)	34.2 (7688)
4.6 (15'1")									31.6 (7104)	35.9 (8071)
4.5 (14'8")									33.1 (7441)	
4.4 (14'4")									34.9 (7846)	
4.3 (14'1")										
4.2 (13'8")										
4.1 (13'5")										
4.0 (13'1")							21.3 (4788)	24.5 (5508)		
3.9 (12'9")							22.8 (5126)	26.4 (5935)		
3.8 (12'5")							24.2 (5440)	28.3 (6362)		
3.7 (12'1")							25.8 (5800)	30.4 (6834)		
3.6 (11'9")							27.4 (6160)	32.7 (7351)		
3.5 (11'5")					20.6 (4631)	24.1 (5418)	29.0 (6519)	35.1 (7891)		
3.4 (11'1")					22.1 (4968)	26.3 (5913)	30.7 (6902)			
3.3 (10'9")					23.7 (5328)	28.4 (6385)	32.3 (7261)			
3.2 (10'5")					25.3 (5688)	30.8 (6924)	33.6 (7554)			
3.1 (10'2")					27.0 (6070)	33.6 (7554)	34.5 (7756)			
3.0 (9'10")			20.4 (4586)	24.4 (5485)	28.7 (6452)	36.4 (8183)	35.5 (7981)			
2.9 (9'6")			22.0 (4946)	26.9 (6047)	29.5 (6632)					
2.8 (9'2")			23.7 (5328)	29.4 (6609)	30.4 (6834)					
2.7 (8'10")			25.0 (5620)	31.8 (7149)	31.3 (7037)					
2.6 (8'6")			25.9 (5823)	34.2 (7688)	32.4 (7284)					
2.5 (8'2")	20.0 (4496)	24.3 (5463)	26.9 (6047)		33.5 (7531)					
2.4 (7'10")	21.1 (4743)	26.7 (6002)	27.7 (6227)		34.7 (7801)					
2.3 (7'6")	22.2 (4991)	29.1 (6542)	28.6 (6430)		35.9 (8071)					
2.2 (7'2")	23.1 (5193)	31.5 (7082)	29.6 (6654)							
2.1 (6'10")	23.7 (5328)	33.9 (7621)	31.0 (6969)							
2.0 (6'6")	24.3 (5463)	36.3 (8161)	32.3 (7261)							
1.9 (6'2")	25.5 (5733)		33.9 (7621)							
1.8 (5'10")	26.6 (5980)		35.5 (7981)							
1.7 (5'6")	28.0 (6295)									
1.6 (5'3")	29.8 (6699)									
1.5 (4'9")	31.5 (7081)									

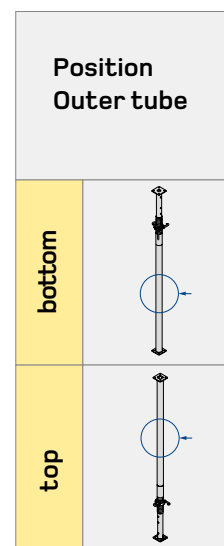

**TIP:** Increased load capacity by flipping the post shore used upside down

permissible load capacity (kN/lbs) depending on extension length and outer tube position (as per general building inspectorate approval Z-8.311-946)

